

VLT Observations of Two Unusual BAL Quasars

Patrick B. Hall

Princeton University Observatory, Princeton, NJ 08544, USA

Damien Hutsemékers

Research Associate FNRS, University of Liège, Belgium

Abstract. Among the unusual broad absorption line quasars being found by the Sloan Digital Sky Survey (SDSS) are objects with much stronger absorption in Fe III than Fe II. These unusual line ratios require a high density in the outflow ($n_H \geq 3 \times 10^{10} \text{ cm}^{-3}$). They should also appear for only a limited range of outflow column densities, which explains their rarity. Previously we suggested that the Fe III line ratios were also affected by a resonance; we now believe this is an artifact of structure in the underlying Fe II+Fe III pseudocontinuum. The SDSS is also discovering objects with absorption in rarely seen transitions such as He I. VLT+UVES high-resolution spectra of one such object, the mini-BAL quasar SDSS 1453+0029, show that it has two He I absorption systems with considerably different properties separated by only 350 km s^{-1} .

1. A Luminous Fe III-dominant BAL Quasar

Broad Absorption Line (BAL) quasars show absorption from gas with blueshifted outflow velocities of typically $0.1c$. About 10% of quasars exhibit BAL troughs, usually attributed either to an orientation effect such that all quasars have BAL outflows covering $\sim 10\%$ of the sky, or a phase of $\sim 100\%$ covering lasting $\sim 10\%$ of the typical quasar lifetime. Understanding BAL outflows is necessary since the BAL outflow mass loss rates seem comparable to the accretion rates required to power quasars. Unusual BAL quasars delineate the full range of physical conditions and parameter space spanned by BAL outflows. The Sloan Digital Sky Survey (York et al. 2000; www.sdss.org) has discovered populations of unusual low-ionization broad absorption line quasars ('LoBALs'), many of them 'FeLoBALs' with absorption from excited Fe II or Fe III (Hall et al. 2002).

One population of unusual BAL quasars has unprecedented line ratios which are the reverse of those seen in previously known objects; namely, LoBALs with stronger absorption in Al III than Mg II and FeLoBALs with weak or no Fe II absorption but with Fe III even stronger than Mg II (Fig. 1a). The CLOUDY modeling of de Kool et al. 2002 (his Figs. 6-7) shows that these ratios can be produced in a high density outflow ($\log n_H \geq 10.5 \text{ cm}^{-3}$ for ionization parameter $U \simeq -2$) with column density N_H in a narrow range (~ 0.2 dex) such that a partially ionized zone of Fe II and Mg II — typically present in AGN broad emission

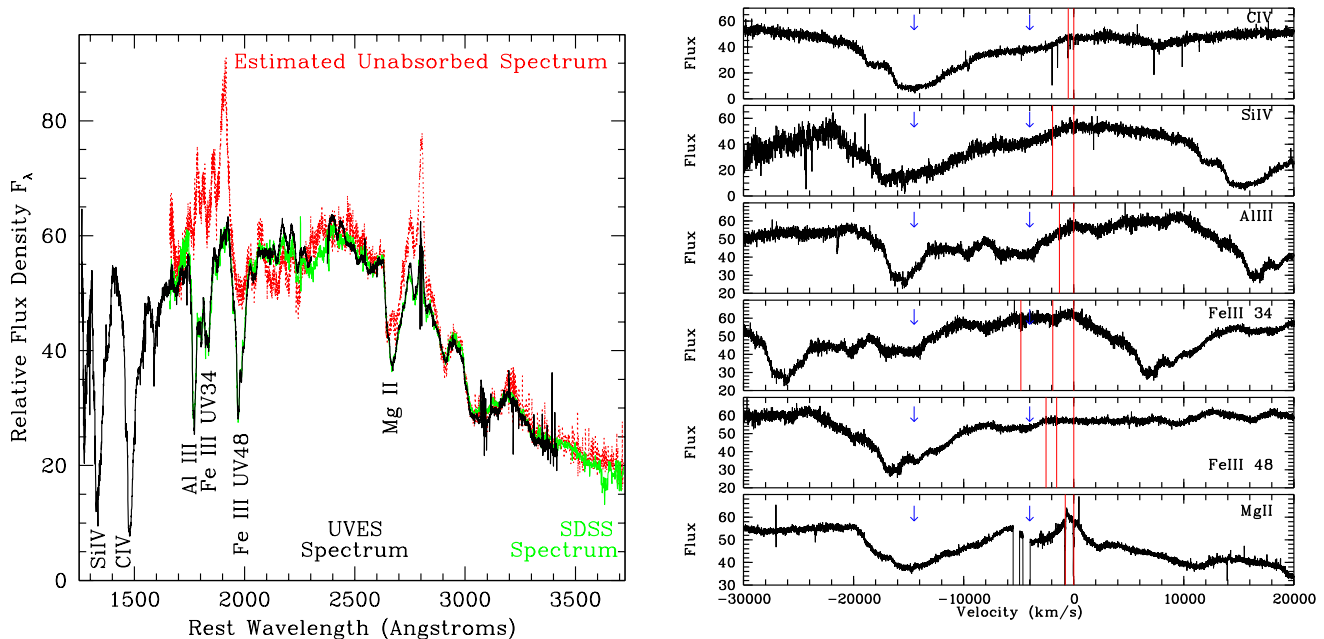


Figure 1. UVES spectra of the Fe III-dominated BAL quasar SDSS 2215-0045, a) compared with a model for its unabsorbed spectrum, and b) showing various absorption troughs on the same velocity scale.

line regions — does not exist in the BAL outflow along our line of sight, but a Fe III+Al III zone does. The high densities and narrow range in N_H required to reproduce the observed line ratios explains why these objects are so rare. The SDSS has recently found a quasar with a narrow Fe III-dominated absorption system for which high-resolution spectra could test this explanation. Unfortunately, the most luminous Fe III-dominated BAL quasar known, SDSS 2215-0045, cannot test this model since a VLT+UVES spectrum shows no narrow features. However, the UVES spectrum does reveal that C IV and Si IV emission are as weak as Al III. This might be due in part to a weak absorption trough at $\sim 4000 \text{ km s}^{-1}$ in addition to the main trough at $\sim 15000 \text{ km s}^{-1}$ (Fig. 1b, blue arrows).

The Fe III UV48 $\lambda 2080 \text{ \AA}$ absorption in SDSS 2215-0045 appears stronger than the UV34 $\lambda 1910 \text{ \AA}$ absorption, which is unphysical. In Hall et al. 2002 this was attributed to a previously unknown resonance populating the lower term of UV48, but we now believe it is due to a complicated underlying continuum. As seen in Fig. 1a, the unabsorbed continuum of 2215-0045 (thin dotted red line) can be estimated as a power law plus Fe II+Fe III emission (using the extreme Fe emitter SDSS 0923+5745 as a template), all reddened by $E(B-V)=0.06$. Due to the strong emission at $1800 \text{ \AA}$ and the lack of emission at $2000 \text{ \AA}$, the observed spectrum (heavy line) appears consistent with saturated Fe III UV48 and UV34 absorption with 35% partial covering. The lower-ionization Mg II absorption has smaller partial covering, which is typical. The Fe-emission template is not a perfect fit (e.g., 2215-0045 has weaker Mg II and C III] emission than the template), but it shows the spectrum can be fit without invoking a new Fe III resonance.

2. A Reddened Mini-LoBAL Quasar

Traditionally, objects with troughs <2000 km/s wide, or with absorption solely within 3000 km/s of the quasar redshift, have not been classified as BAL quasars. However, numerous studies have shown that both ‘mini-BALs’ and many narrow associated systems also arise in the central regions of AGN. Thus in Hall et al. (2002) we suggested an alternative to the traditional balnicity index which does not discriminate against narrow intrinsic absorbers. The physics of AGN outflows are more easily studied with such objects, since in BALs most doublet transitions are blended and cannot be used to infer the physical conditions or other parameters of the outflow. For example, studies of numerous intrinsic AGN outflows have shown that the troughs are usually saturated. In such cases, the trough depth in high-resolution spectra yields that ion’s covering factor as a function of velocity. Then, knowing the relative strengths of the various transitions observed, interesting conclusions can be drawn by examining the spectra.

An excellent example is the reddened, extreme-Fe II-emitting, mini-LoBAL quasar SDSS 1453+0029, which has $z=1.2899\pm0.0008$ from an ISAAC near-IR spectrum (Fig. 2). Broadly speaking, this object has two He I absorption systems within a more extensive (in velocity space) set of Mg II absorption systems. This He I absorption arises in an excited state populated by recombination ($\text{He II} + e^- \rightarrow \text{He I} + \gamma$). Thus this He I absorption traces the column density of He II, which yields a lower limit on N_H since hydrogen is completely ionized in He II regions. Component A in SDSS 1453+0029 appears to have equally strong He I $\lambda 3188$ and He I $\lambda 3889$ absorption (Fig. 3). Since the latter transition is intrinsically much stronger, this means that He I $\lambda 3889$ is saturated. The covering factor of the He I ($\sim 50\%$) is less than that of Mg II ($\sim 85\%$) by inspection. Component B has He I line ratios consistent with He I $\lambda 3889$ being at most only slightly saturated, but its velocity-dependent covering factor reaches a maximum $\sim 90\%$ while that of Mg II is only $\sim 60\%$. Thus, He I and Mg II absorption can behave very differently, even over small velocity ranges, and even when the two components are very likely in physical proximity as indicated by their nearly identical velocities.

Acknowledgments. Based on data from ESO programs 267.A-5698 and 67.A-580. Funding for the SDSS Archive has been provided by the Alfred P. Sloan Foundation, the Participating Institutions, NASA, the NSF, the U.S. Department of Energy, the Japanese Monbukagakusho, and the Max Planck Society. The SDSS is managed by the Astrophysical Research Consortium, for the Participating Institutions: The University of Chicago, Fermilab, the Institute for Advanced Study, the Japan Participation Group, The Johns Hopkins University, Los Alamos National Laboratory, the Max-Planck-Institute for Astronomy, the Max-Planck-Institute for Astrophysics, New Mexico State University, University of Pittsburgh, Princeton University, the USNO and the University of Washington.

References

- de Kool, M. *et al.*: 2002, ApJ, 570, 514
- Hall, P. B. *et al.*: 2002, ApJS, 141, 267
- York, D. G. *et al.*: 2000, AJ, 120, 1579

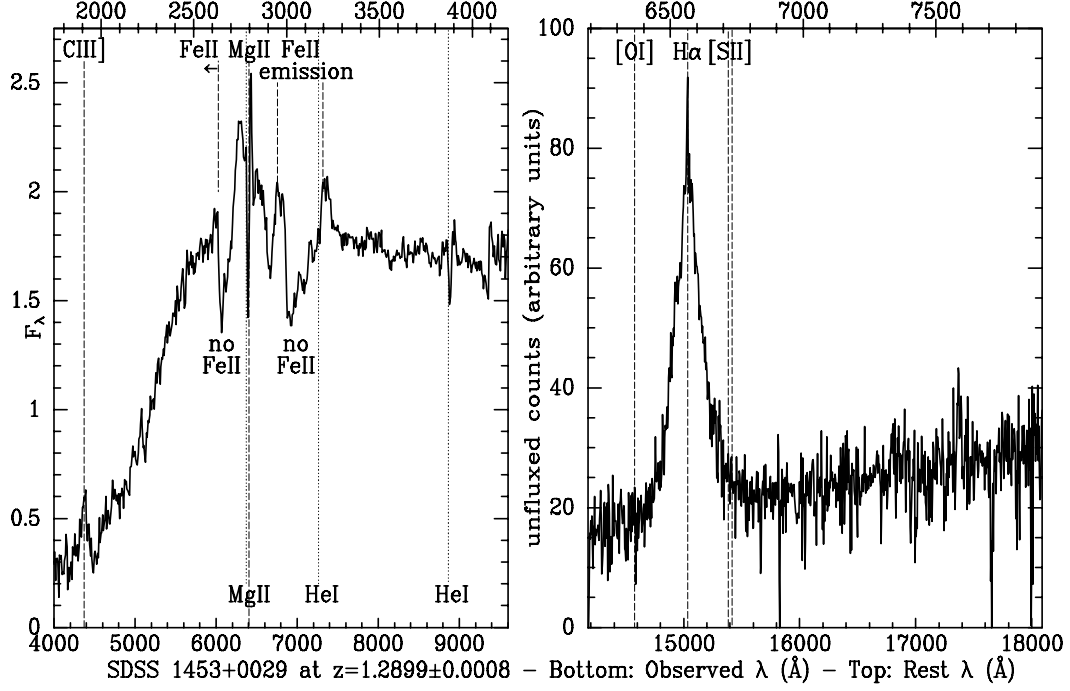


Figure 2. Optical & VLT+ISAAC NIR spectra of the mini-LoBAL 1453+0029. The narrow H α z agrees with the UVES absorption z .

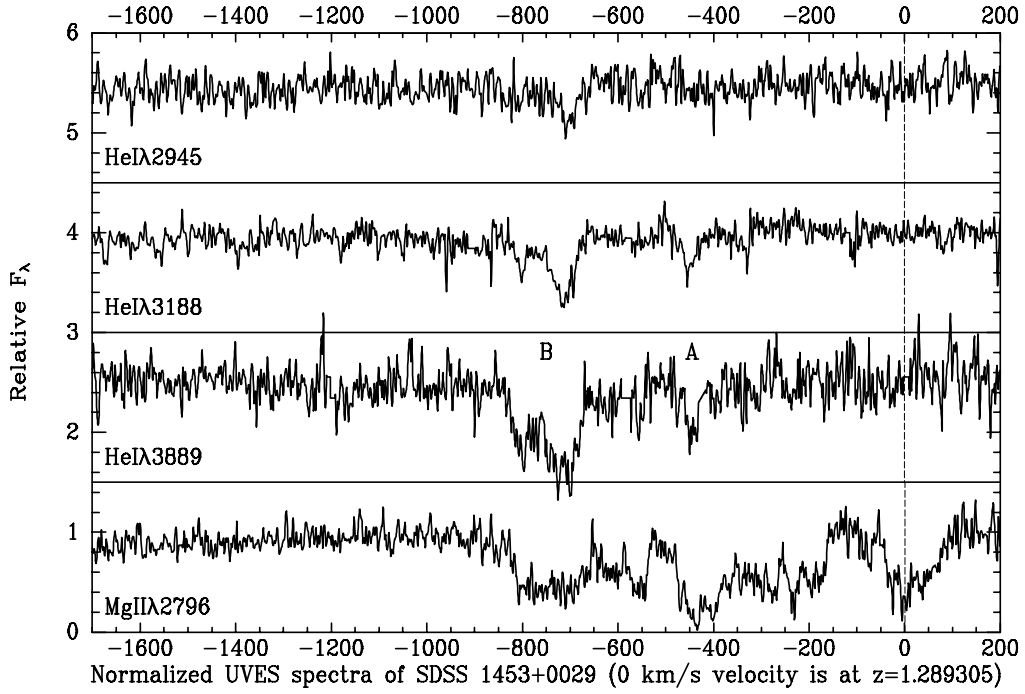


Figure 3. Important transitions in the UVES spectrum of 1453+0029.